

TECHNICAL DATA SHEET

Novatik | **METAL**

FALTZ

NOVATIK Mini-Coils -
standing seam roofs and metallic facades.



Inspiring architects since ancient times, standing seam roofs find its place successfully even today, meeting all the requirements of a modern design with superior, durable and recyclable materials.

Discover the durability and flexibility of Novatik METAL FALTZ standing seam, a high quality product, soft material of class DX53 or DX51, optimized for metal coating applications designed for small slopes. Novatik METAL FALTZ combines excellent processing properties of metal, providing first class warranty.

>LAYERS

ROBUST RAIN / MAT

1. **ROBUST RAIN:** Polyester 35 μm ;
MAT: Polyester 35 μm ;
(on the front side);
2. Grund;
3. Protective layer of: Zn / ZnMg;
4. Steel;
5. Protective layer of: Zn / ZnMg;
6. **ROBUST RAIN:** Polyester 35 μm ;
MAT: Polyester 10 μm / 7 μm ;
(on the back side).

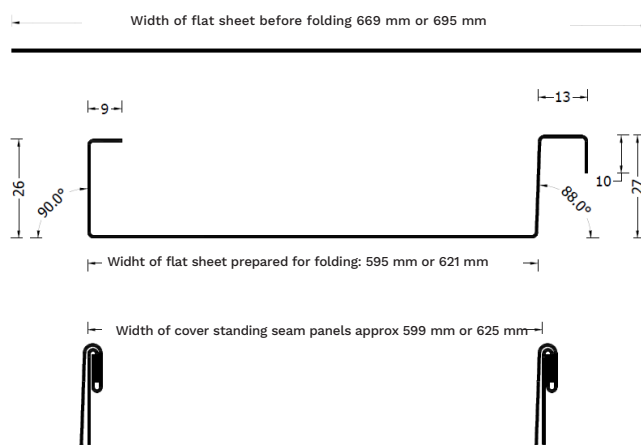

Novatik | **METAL**
FALTZ ROBUST RAIN

20

YEARS

WARRANTY

RAW MATERIAL: steel DX53 with protective layer of Zn 275 g/sqm;

PROTECTION LAYER : Colofer Robust 35 microns/ 35 microns;

NOMINAL THICKNESS: 0.59 mm;

SPECIFIC WEIGHT: 4.15 kg/sqm;

MINI-COIL LENGHT: 50 ml;

MINI-COIL WEIGHT 669 MM WIDTH : -140 kg/piece;

ROOF PITCH: from 5 degrees;

DELIVERY: Rolling on hard cardboard and protective film all over the surface of the mini-coil;

WARRANTY: 20 years;

AVAILABLE WIDTHS: 669 mm.



Novatik | **METAL**
FALTZ MAT

15

YEARS

WARRANTY

RAW MATERIALS :

- steel DX51 with protective layer of ZnMg 120 g/sqm;
- oțel DX51 cu protecție Zn 275 g/mp;

PROTECTION LAYERS:

- Colofer Mat 35 microns/10 microns;
- Polyester Mat 35 microns/7 microns;

NOMINAL THICKNESS: 0.50 mm;

SPECIFIC WEIGHT : 3.57 kg/sqm or 3.70 kg/sqm;

MINI-COIL LENGHT : 50 ml;


MINI-COIL WEIGHT 695 MM MM WIDTH: approx. 124 kg/piece or approx. 128 kg/sqm;

ROOF PITCH: from 5 degrees;;

DELIVERY: Rolling on hard cardboard and protective film all over the surface of the mini-coil;

WARRANTY: 15 years;

AVAILABLE WIDTHS: 695 mm.

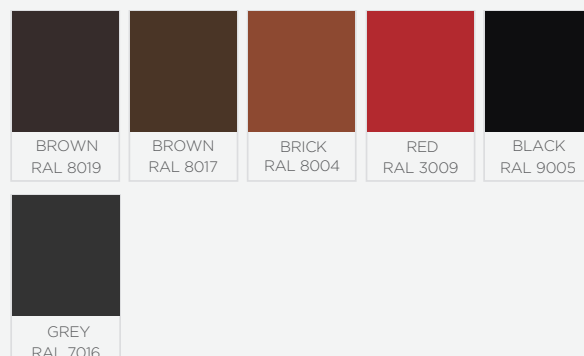

Manufactured by NOVATIK SRL

HEAD QUARTERS: 9 Mai street, no. 75, 105 200 Băicoi, Prahova, România; Tel: +40 244 260 140; Fax: +40 244 260 145; office@novatik.ro; novatik.ro
Novatik METAL FALTZ Technical Data Sheet - ENG_V2 January 2023